CRIMESTOPPER

CS-2011RS

Super Rage™

Remote Control Alarm System & Remote Engine Starting System

OPERATION INSTRUCTIONS

INTRODUCTION

CONGRATULATIONS on your choice of a Super Rage™ *Alarm & Remote Engine Starter by Crimestopper Security Products Inc.* This booklet contains the information necessary for using & maintaining your system. If any questions arise, contact your installation dealer or Crimestopper Security Products Inc.

CONTACT INFORMATION:
TECHNICAL SUPPORT (800)-998-6880
Monday - Friday 8:00am - 4:30pm Pacific

Website: www.crimestopper.com
E-mail: tech-support@crimestopper.com

CRIMESTOPPER
SECURITY PRODUCTS, INC.
1770 S. TAPO STREET
SIMI VALLEY, CA. 93063

This device complies with FCC Rules part 15. Operation is subject to the following two conditions: 1) This device may not cause interference, and (2) this device must accept any interference that may be received, including interference that may cause undesired operation. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modification to this equipment. Such modification could void the user's authority to operate the equipment.

OPERATION CAUTIONS & WARNINGS

CRIMESTOPPER SECURITY PRODUCTS, INC. *and its* ***VENDORS*** *shall not be liable for any accident resulting from the use of this equipment. This system is designed to be professionally installed into a car or vehicle in goo running order. Items, such as parking brake, door switches, and all engine safety features, must be in perfect working condition.*

IT IS ABSOLUTELY THE OWNER'S SOLE RESPONSIBILITY TO: *A) Understand the operation of this system and its safety features. B) Check for proper operation of these safety features prior to accepting delivery of the vehicle from the installation facility. C) Check and maintain the condition of the vehicle and all items relative to the proper operation of this system and its safety features.*

DO NOT remote start the vehicle in a closed garage. *Make sure that the garage door is open or there is adequate ventilation. Failure to observe this rule could result in* ***injury or death*** *from poisonous Carbon Monoxide fumes. This is especially important when using the Time Self-Start feature of the unit*

OPERATING INSTRUCTIONS

Active Arming / Locking:
Press button #1 (Lock symbol) on the transmitter. System will arm and confirm with one siren chirp, one light flash, and the LED begins to flash slowly. Power locks will lock (if equipped). Starter disable circuit is enabled

Disarming: / Unlocking
Press button #2 (Unlock symbol) on the transmitter. System will disarm and confirm with two siren chirps, two light flashes, and LED will turn off. Power locks will Unlock and Interior Dome light will turn on (if installed with these optional features)

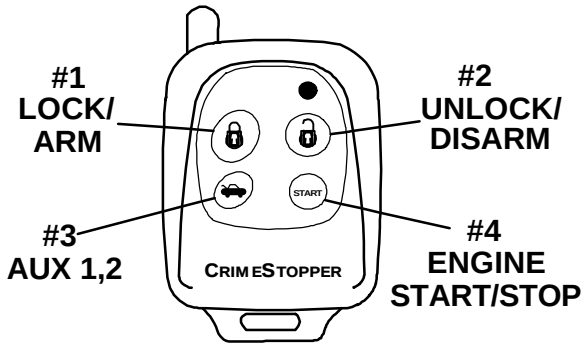

CS2011RS TRANSMITTER

Disarming While Tripped (Triggered):
Disarming the System when it is triggered requires two presses of the #2 Unlock Button. The first press of Button #2 Resets the alarm cycle only (system still armed) while a second press will disarm/unlock the system.

Silent Arming/Disarming:
To Arm or Disarm the system without siren chirps, press and release both Buttons #2 (Unlock) and #4 (Start) at the same time. System will Arm or Disarm without siren chirps. Flashing lights and LED will be the only indicators of Arm/Disarm status. If the system was tripped while you were way, 4 chirps will be heard to notify you that the system was tripped.

OPERATING INSTRUCTIONS

Passive Arming Mode: (Programmable)

Passive (automatic) arming occurs 30 seconds after the ignition is turned off and the last door is closed. Upon closing the last door, the unit will flash the lights twice and LED will be flashing rapidly to confirm passive countdown. If a door is reopened within the 30 second period, the countdown stop and begin again when the door is closed. Passive arming provides failsafe protection in case you forget to arm the system. The CS2011RS system can be programmed to passively lock the doors also when passive arming, however the default setting is OFF because this increases the risk of lock the keys in the vehicle.

Arming With Shock Sensor Bypass

To arm the alarm and bypass shock sensor protection, press Button #1 as normal then press and release Button #1 and #2 together within 2 seconds. You will hear 3 extra siren chirp indicating shock sensor bypass for this arming cycle only.

Alarm Triggering

An intrusion into the vehicle or hard impact to the body will sound the alarm and flash the lights for 1 minute. After 1 minute the trigger cycle will automatically stop and alarm will remain armed to continue protecting the vehicle. If a door is left open after an intrusion then the unit will cycle a maximum of 5 minutes and continue to protect the other un-tampered or unopened zones.

Prior intrusion Alert

This system will notify you if the alarm was tripped while you where away. Upon disarming, the two normal disarm chirps will be heard then the system will emit 4 more siren quick chirps. Check your vehicle for any signs of a break in or tampering.

Remote Panic Protection

To sound the alarm in an emergency situation or to draw attention to your vehicle, press and hold Button #1 (Lock) for at least 3 seconds until the siren sounds. Press Button #2 (Unlock) to reset panic mode.

Trunk/Hatch Pop (Optional, Remote AUX. Output 1)

Disarm the system (if armed), press and release Button #3 (Trunk Symbol) on the transmitter to pop/open the trunk/hatch. This feature is designed to interface with existing Factory power trunk or power hatch release systems and may require additional parts and/or labor charges. Consult with your installing dealer.

Remote AUX. Output 2, Optional

This system contains a second auxiliary output to activate other accessories or devices. To activate the systems' Second Auxiliary Output, press and hold Button #3 (Trunk Symbol) on the transmitter for more than 2 seconds. This is a momentary output that will stay active as long as the remote button is held down.

OPERATING INSTRUCTIONS

Pre-Warning Shock Protection

The Pre-warning (warn-away) feature will activate when a low-level shock or vibration detected by the system's shock sensor. The alarm will chirp the siren 6 times and flash the lights twice to help deter any further tampering with the vehicle.

Emergency Override (Disarm)

If you have lost the transmitter or it stops working for any reason and the Alarm is armed, you will have to disarm the system manually. Open the door with the key [alarm will sound], turn the ignition on, and press the override/program button for about 5 seconds. The Alarm will disarm and allow you to use the vehicle until you can repair/replace the remote. Note that you may need to put the system into valet mode to prevent passive arming.

Valet Mode (Manual and Via Remote)

To disable Alarm and Remote Engine Starting for vehicle servicing or otherwise, turn the ignition on and press the override/program button [about 5-7 seconds] until you hear (3) siren chirps and the LED turns on solid. Repeat the process to exit VALET mode. To enter / exit valet via the remote, press and hold both buttons #1 (Lock) and Button #2 (unlock) together for about 3 seconds until 3 chirps are heard. Repeat this step to exit via the remote transmitter. Lock/Unlock and AUX features will still operate in when in VALET mode however remote start is inhibited.

Valet Park Mode (Via remote transmitter only)

Note: Valet Park mode is only accessible when using the remote transmitter. Valet park mode allows you to turn over the vehicle to a valet allowing access to drive/lock/unlock your vehicle, but alarm will trigger if the trunk is opened. To activate Valet Park, press and hold both buttons #1 (Lock) and Button #2 (unlock) together for about 6 seconds. 3 chirps will be heard first when unit goes into regular Valet and as you continue to hold both buttons you will hear 2 more chirps. LED will flash slowly when in Valet Park. Repeat step to exit Valet Park mode.

Optional M.A.P. (Mobile Accessories Protection)

This system can be programmed to provide Crimestopper's unique M.A.P. (Mobile Accessories Protection) feature that allows you to prevent unauthorized access of your vehicles Audio, Cellular, Navigation, or Entertainment systems. This feature is OPTIONAL and will requires extra parts and labor for installation. Consult your installation dealer about MAP before or during installation. The CS2011RS must be programmed for MAP operation. When the system is put into Valet Park mode, M.A.P. will prevent stereo, entertainment, navigation, or cellular system from being used.

REMOTE ENGINE CONTROL

REMOTE ENGINE STARTING - SUCCESSFUL START:

1) Press remote start button on the remote transmitter.
2) Parking lights flash once, then turn on solid, Ignition/Acc On.
3) After 6 seconds Starter Motor engages, Parking lights and Acc circuits turn off while cranking.
4) Engine Starts and Runs. Parking Lights and Acc turn back on, Doors Lock.
5) Engine will remain running for programmed run time until reset with Brake pedal. If needed, the engine can be turned off with remote transmitter.

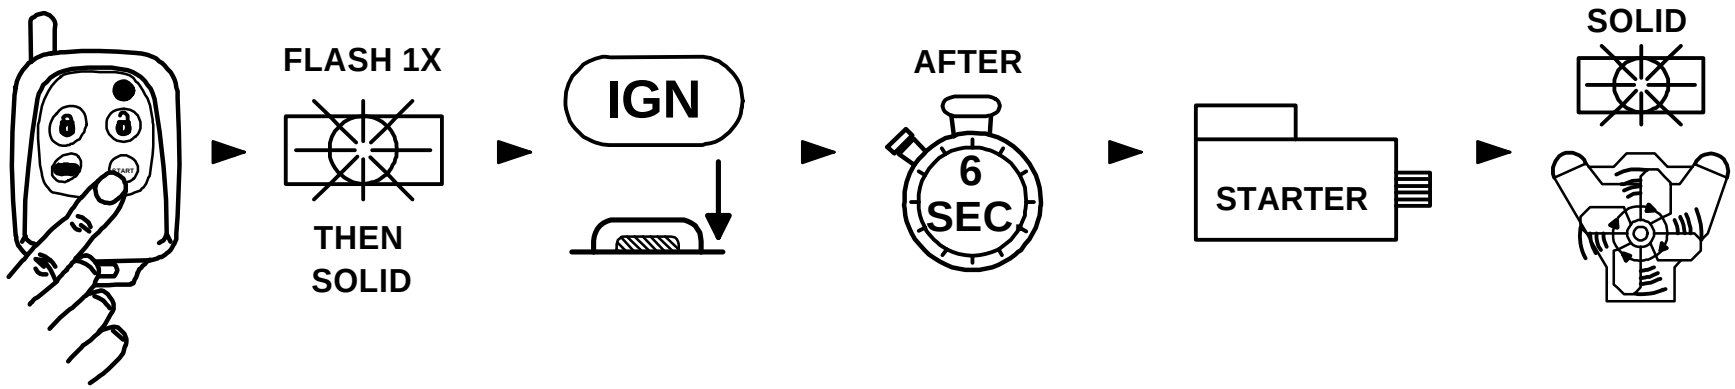

REMOTE ENGINE STARTING - UNSUCCESSFUL START

In the event that the engine does not start on the first attempt, the system shuts down for a few seconds, then attempts to restart the engine a 2nd and 3rd time. For hard starting engines, the unit will allow a starter crank time of up to13 seconds maximum. This should provide ample cranking time for difficult starts, but is limited to 13 seconds to help prevent damage to the starter from over cranking.

1) If engine starts on 2nd or 3rd attempt, see steps 4 & 5 above of "Successful Start".
2) If Third attempt fails to start engine, the system will turn off and doors will remain locked. *NO FURTHER ATTEMPTS WILL BE MADE AUTOMATICALLY*

TURNING OFF A REMOTE STARTED ENGINE:

1) Engine is running in Remote Start (Parking lights ON).
2) Press Remote Start button on remote transmitter.
3) Engine & parking lights turn OFF, Doors remain locked or will re-lock/re-arm if applicable.

REMOTE ENGINE CONTROL

IDLE DOWN MODE:

This mode allows the unit to take over operation of the parked vehicle while the ignition key is removed and you exit the vehicle. The vehicle is put into a remote running condition before you exit and it will remain running for the programmed run time, until you return, or press the remote start button.

Examples:

- *You pull up to a convenience store for a quick stop, "Idle Down" mode keeps engine running when you exit the vehicle, (with keys in hand) remote lock/arm alarm. When you return, unlock/disarm alarm, turn ignition ON and drive away.*
- *This mode can be used for some models of Turbocharged vehicles where it is recommended that the driver leave the car at idle for cool down then turn off the engine via remote control.*

IDLE DOWN MODE - EXITING THE VEHICLE:

1) With engine running, press Remote Start button on remote transmitter.
2) Parking Lights will turn ON.
3) Doors will unlock, or if brake pedal is being depressed doors will unlock when it is released.
4) Turn OFF Ignition and remove key. Engine should remain running.
5) Exit vehicle then remote lock doors if desired.
6) Engine will remain running for programmed run time, until you return, or press the remote start button.

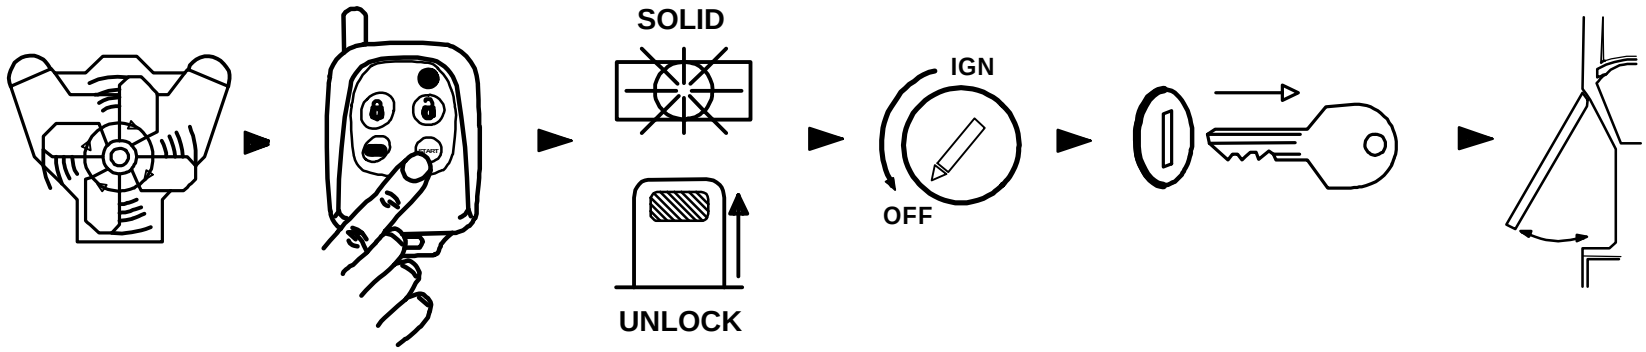

ENTERING A VEHICLE DURING “IDLE-DOWN” or “INFINITY RUN” MODES:

1) With engine running in "IDLE DOWN", Remote Unlock/Disarm system (If armed) or open door with key.
2) Enter vehicle and be careful not to step on brake pedal! (Remote Start Reset)
3) Turn Ignition to ON/RUN position, then depress brake pedal to reset the Remote Starter. Parking lights will turn off. Then drive away.

REMOTE ENGINE CONTROL

INFINITY RUN MODE

This mode allows the vehicle's engine to remain running *INDEFINITELY.* This mode can be beneficial to law enforcement vehicles or commercial vehicles trucks that need to remain running unattended for long periods of time.

INFINITY RUN MODE – EXITING THE VEHICLE:

1) Have engine running with the Key, then press the Start button on the transmitter once, then press the remote start button a second time within 10 seconds.
2) Parking Lights will start flashing, and doors will unlock.
3) Turn Ignition switch OFF, remove key and exit the vehicle. Engine should remain running.
4) The vehicle's parking lights will flash for the programmed run time of 12, 24, or 36, or 48 minutes and then switch to solid while motor runs indefinitely or until fuel supply runs out.

TIMED SELF START MODE

This mode allows the vehicle to be programmed to self-start every 4 hours and run for the programmed run time. This can be helpful during extremely cold conditions where engine fluid freeze-up is a concern. Be sure that the vehicle is outdoors or in a well ventilated area. To reset this mode either start the vehicle with the key or with the remote control.

TIMED SELF-START MODE – EXITING THE VEHICLE:

1) Have engine running with the Key, then press the Start button on the transmitter.
2) Within 10 seconds press the valet/program button once.
3) Parking Lights will turn OFF for about 5 seconds, and doors will unlock.
4) Turn Ignition switch OFF, remove key and exit the vehicle. Engine should remain running.
5) To turn off the engine, press the remote start button. The parking lights will flash 4 TIMES as a confirmation that the unit is in Timed Self-Start Mode.
6) The Vehicle will Start by itself every 4 hours until driven with key or started via remote control.

CARJACK PROTECTION

REMOTE OPERATED CARJACK PROTECTION

This feature provides Active Carjack protection through the remote control. When the Ignition is on (vehicle is running), press and hold the #1 LOCK Button and #3 TRUNK Button for 2 seconds. The parking lights will flash 2 times and the LED will begin to flash rapidly to confirm the beginning of a Carjack countdown. 30 Seconds later, the unit will begin a Carjack Cycle consisting of 20 seconds of pre-warning chirps turning into a full system activation with siren / flashing light pulses for up to 5 min. If the Ignition is turned off during a Carjack trigger the siren and lights stop but Carjack protection is still active. The Siren and Lights will resume if the Carjacker tries to turn the Ignition back ON.

To reset Active Carjack, press Button #2 (UNLOCK) on the remote and the siren will chirp once, or turn the key on and press and hold the override button for at least 5 seconds.

SWITCH-CONTROLLED & FULL TIME CARJACK (PINK WIRE CONFIGURATION)

This feature can provide Passive or Manual control Carjack protection depending on the configuration of the Pink Carjack wire of the alarm system. The system must programmed for the Pink wire to be used as a Carjack trigger at option #12. Once programmed for the Pink wire to serve as a Carjack trigger, it can be configured in different ways to provide different levels of protection. It can be connected to a hidden +12V toggle/momentary switch or to +12V Ignition Power. Read the sections below for further descriptions.

SWITCH-CONTROLLED:

This configuration will enable the vehicle owner to activate a Carjack countdown by pressing a hidden push-button (not included with kit) during a Carjack situation. A Carjack countdown will begin under the following conditions: Ignition is ON (vehicle is running), the push-button is pressed, and the door opens/closes. Upon these 3 events, in that order, the alarm will start a Carjack countdown. After a delay of one minute, the system will begin chirping for 20 seconds then trigger into a full cycle for up to 5 minutes. To reset this Carjack mode, Ignition must be ON then press and hold the override/valet button for 5 seconds (until LED goes out.)

FULL-TIME [Permanent] CARJACK:

We recommend that this configuration only be used in serious situations. When the Ignition is on (vehicle is running), anytime a door is opened the Carjack countdown sequence will be initiated. There will be 2 light flashes and the LED will change from solid to quick pulsing as confirmation of a countdown sequence. To reset FULL TIME Carjack, the Ignition has to be ON, then press and hold the override/program button 5 seconds until LED stops pulsing. The LED will be on SOLID when in this mode anytime the Ignition is ON (or while driving) as a reminder that Carjack is waiting for a door to open.